


RSD V Strongroom Door

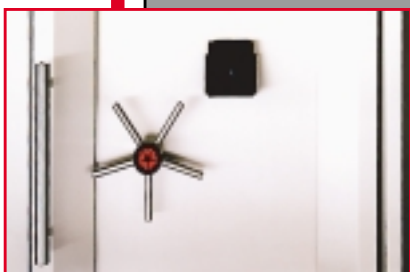

Strongroom Door RSD V

Rosengrens Strongroom Door, grade V tested and approved by the German VdS Test Institute in accordance with the CEN/Euro burglary standard.

CEN/Eurotest - High quality

As part of the ongoing process to have common European standards, safes and strongroom doors test standards have been set. Strongroom door approvals comprise grade V through XIII.

To comply with the CEN/European standard, ISO 9000 quality approval is a prerequisite and the Rosengrens factories comply with this requirement.

Attractive design

The RSD V can be finished in a range of colours with a decorative aluminium facia to complement the vault area.

As an alternative the front of the door can be finished in stainless steel.

Lock alternatives

For grade V doors two class B(2) approved high security locks are required. For RSD V the following alternatives are available:

- Two key locks
- Two combination locks
- Two electronic high security locks
- A combination of above locks.

The key lock, Rosengrens RKL-10, can easily be reset to accept a new key bit if a key is lost or there is a change of staff. The electronic lock has double circuits for highest reliability and is very easy to operate. Other features are, e.g. several user codes, time lock, time delayed opening etc.

Solid frame - High security

The solid frame construction increases the security of the door and enables installation in wall thicknesses up to 550 mm.



Example, one panel controlling two electronic locks


Grille gates

The frame is prepared for Rosengrens grille gates, with both key- and electronic locks:

- RVG: Grille gate with attractive aluminium frame with sheets of engraved acrylic glass.
RGS: Grille gate with horizontal steel bars.

Options:

- Frame for 250-350 mm wall - basic door
- Frame for 350-450 mm wall
- Frame for 450-550 mm wall
- Stainless steel front finish
- Water protection
- Emergency internal release handle (no label).
- Door operated light switch
- Alarm kit according to VdS requirements.

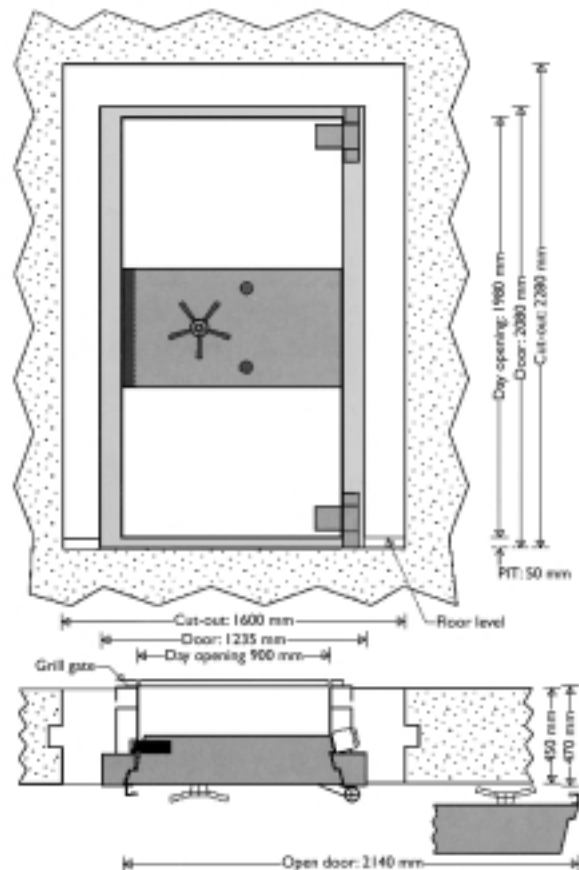

Weight

The strongroom door has a weight of approx. 1500 kgs.

All rights reserved for modifications.